FINCARE SLIP ETCH



DESCRIPTION

Fincare Slip Etch is specially formulated low surfactant concentrated ceramic etch solution and maintenance cleaner that contains acid fluorides. This Fincare Slip Etch will etch the surface of most tiles and glaze to allow adherence of subsequent paints or sealants to the treated surface.

Fincare Slip Etch is an excellent ceramic etch solution and fast acting cleaner when diluted. Dilution will vary depending on the tile type and glaze.

USES

- · Residential and commercial hallways
- Bathrooms, showers, and other wet areas
- Garage, driveway, and pool areas

FEATURES AND BENEFITS

- Easy to use
- Flushes with water
- · Less labour compared to sanding
- Significantly reduces moss, mildew, and lichen growth

APPLICATION GUIDELINES

Ensure substrate is clean, dust free, and dry prior to application. It is highly recommended to undertake a test sample to confirm the suitability of the product for specific substrates and ensure desired results are achieved.

Normally used in a diluted 1:4 water for pretesting with sponge. Note this product is rarely used neat. Ready the equipment for removal from pretest since there are many variations of exposure from time to time.DO NOT allow to dry on the surface, wash with water and allow to dry.

For removal of heavy soils dilute 100ml per litre at a rate of 16-20m2/L with a low-pressure spray.

For maintenance cleaning, use 50ml per 2L with a low-pressure spray or mop.

IMPORTANT

ALWAYS remember the longer the contact time the deeper the etch.

AVOID siliceous materials i.e., glass or ceramic containers.

STRONGLY recommended for professional use only.

PACKAGING

20L metal pail

DISCLAIMER / STATEMENT OF RESPONSIBILITY

Purchase or use of the product referred above ('the Product') constitutes acceptance of these terms. Any information provided by Vulk Pty Ltd ('Vulk') is of a general nature and should not be taken as advice and is, to the extent permitted by law, provided without warranty as to the accuracy, reliability or completeness of that information. Further, no warranty is provided in respect to the quality, suitability or fitness for purpose of the Product. Expert advice should be taken in respect to any use of the Product.


So far as is permitted by law, any party purchasing or using the Product indemnifies Vulk against and releases Vulk from any claim, liability, loss, cost or similar directly or indirectly arising out of the supply or use of the Product or this technical data sheet. Vulk's liability to any party is limited to cost of replacement or repair of the Product and is reduced proportionately to the extent that an act or omission of any other party contributes to the liability.

SHELF LIFE

1 year in unopened, factory sealed container. Safely stored at temperatures between $5^{\circ}\text{C-}35^{\circ}\text{C}$.

SAFETY PRECAUTIONS

Always wear adequate personal protection during use including gloves, eye protection, overalls, and appropriate mask. Apply in adequate ventilation. Refer to Material Safety Data Sheet for further safety information.

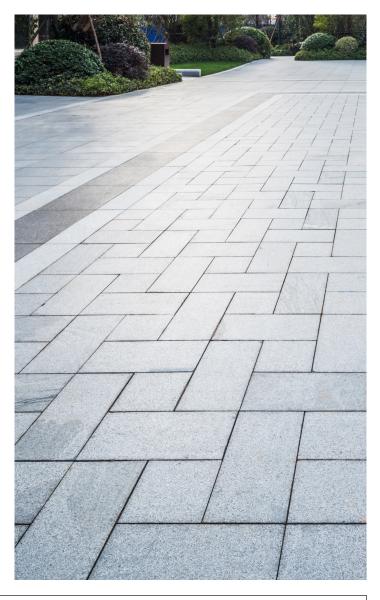

VULK.COM.AU

enquiries@vulk.com.au 5 Piping Lane Lonsdale SA 5160 Phone: 08 7120 6955



